
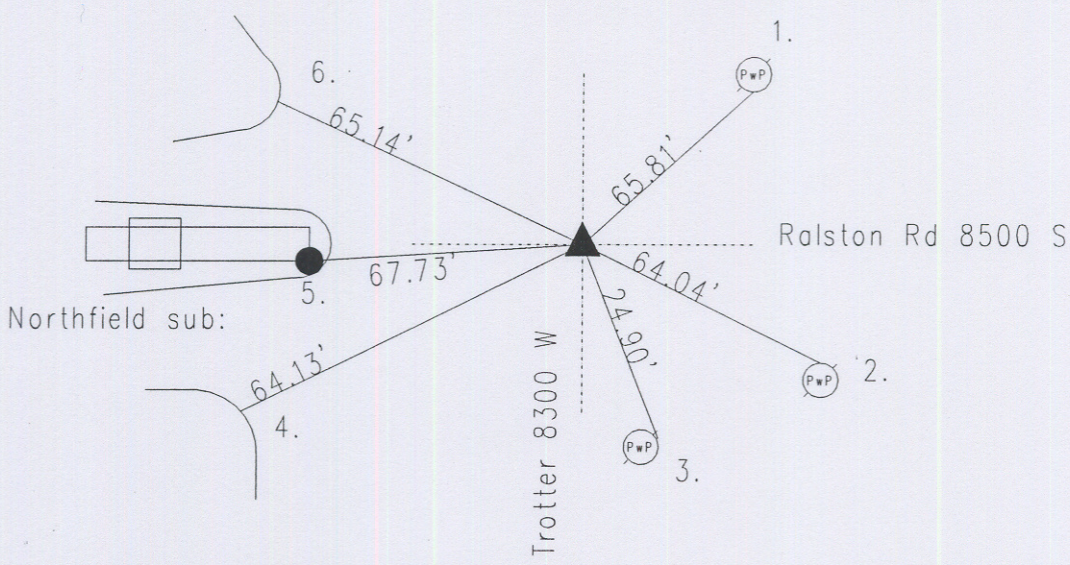


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 22 TOWNSHIP 14 RANGE 2
DATE: 1-8-07
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison fd
METHOD OF ESTABLISHMENT: County: 12-31-00
IN. S.P.C. E ZONE NAD '83
NAME: 14022204
N: 487728.5622(m)
E: 45002.6042(m)

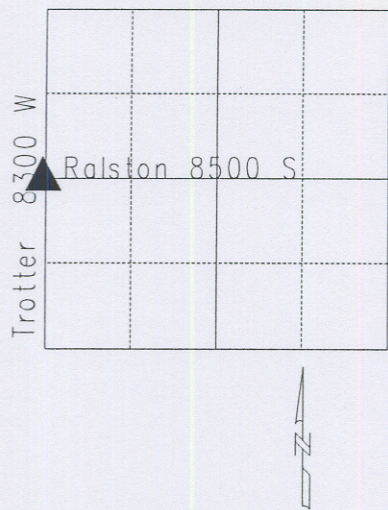

Original post set 1820 by laughlin with witness: 14" beech S 60 E 24 links; 18" dogwood S 40 W 21 links per Marion County Atlas pg. 1. Fatout 9-24-1877 called found rock...new witness: 20" beech N 14 1.2 W 95 links per Decatur Township Legal Survey Book pg. 31. Bookedis 8-24-67 called steel pin over stone. Excavated per Kiste 6-6-91 PK nail found at surface. 3/4" rod 40" long found 6" down leaning against a stone 18" down. Harrison set. Re-tied 3-15-96 by Wilcoxon. Re-tied 12-31-00 by Kiste. Re-tied 1-8-07 by Wilcoxon.

14022204

REF.	DISTANCE	DESCRIPTION
1.	65.81'	PK nail S PwP#32-771YB 8"up
2.	64.04'	PK nail N PwP#2-801Y 18"up
3.	24.90'	Mag nail w/bw F PwP#1-801Y 12"up
4.	64.13'	Cut 'x' in curb
5.	67.73'	SF corner of brick subdivision sign
6.	65.14'	Cut 'x' in curb